



XPON 2GE + 1POTS+1 USB+ WiFi (Mesh) ONT



FEATURES

- ※ Chipset (Realtek) Technology
- ※ IEEE802.11b/g/n/ac Wi-Fi,
- ※ Layer 2/3, Wi-Fi CERTIFIED™
- ※ Support VoIP
- ※ Full Management of HGU Devices Through OLT
- ※ Support Wi-Fi CERTIFIED EasyMesh™
- ※ Compactable with IEEE802.3ah、ITU-T G.984.x

MORE INFO

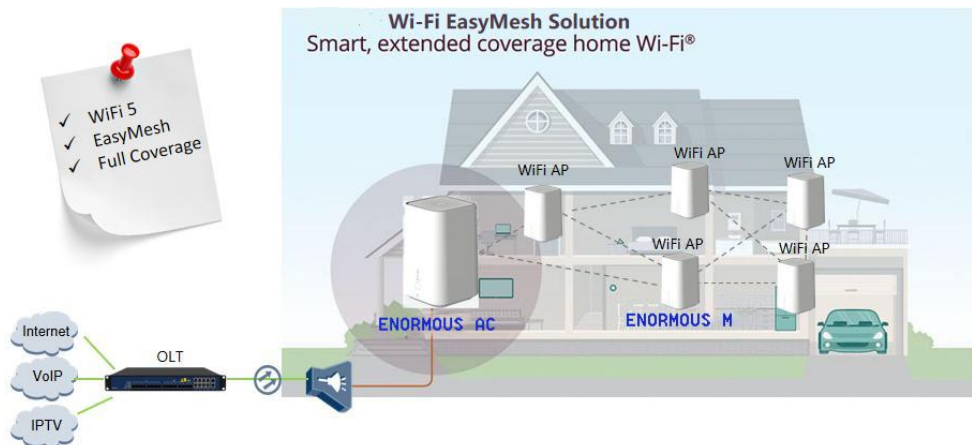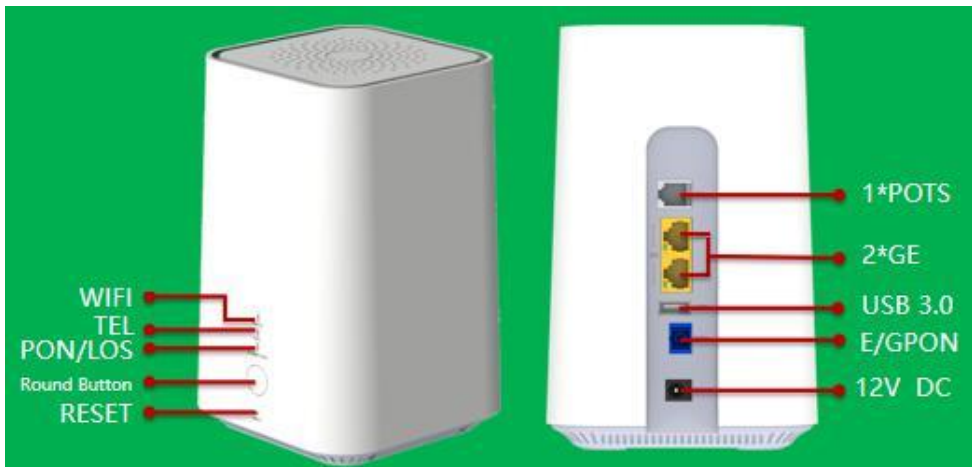

SPECIFICATIONS

Technical Parameters	
PON Interface	1 G/ EPON Port (EPON PX20+ and GPON Class B+)
	Receiving sensitivity: $\leq -28\text{dBm}$
	Transmitting optical power: $0 \sim +4\text{dBm}$
	Transmission distance: 20KM
Wavelength	Tx1310nm, Rx 1490 nm
Optical Interface	SC/UPC connector
LAN Interface	2*10/100/1000Mbps auto adaptive Ethernet interfaces, Full/Half, RJ45 connector
USB Interface	USB 3.0, Transmission Rate: 4.8Gbps
PON Interface	1 x RJ11 connectors G.711A/G.711U/G.723/G.729 Codec,T.30/T.38/G.711 Fax mode, DTMF Relay
WiFi Interface	Compliant with IEEE802.11b/g/n/ac 2.4GHz Operating frequency: 2.400-2.483GHz (WiFi 4) 5.0GHz Operating frequency: 5.150-5.825GHz (WiFi 5 wave 2) WiFi:4*4 MIMO, 5dBi antenna, rate up to 1.167Gbps, Multiple SSID TX power: 11n--22dBm/11ac--24dBm
LED	5 LED, For Status of PON/LOS, Wi-Fi, TEL, LAN1, LAN2
Operating Temperature	-30~+60 °C / Humidity: 10% ~ 90% (Non-Condensing)
Instrument Dimension	115mm×115mm×180m(L×W×H)
Power Supply	DC 12V/1.5A, 12W
Net Weight	625g

